

# HPW-8/10 TOUCH II HEAVY PROFESSIONAL WASHER EXTRACTORS



## VERSATILITY

OPL < > COIN  
ELECTRIC < > HOT WATER  
PUMP < > DRAIN VALVE  
SINGLE < > STACKED  
Wet cleaning features ready  
Suitable for many sectors: restaurants, gyms, campings, mop cleaning, apartments, coin laundries, dry cleaners, nurseries...



## OUTSTANDING FEATURES

High G FACTOR of 450.  
User-friendly and totally programmable TOUCH II microprocessor with a 4,3" touch screen  
8 dosing signals as standard. 2 water inlets  
USB Connection: PC software free of charge for programming, traceability, data analysis...  
Traceability as standard  
Wet cleaning standard with the Touch II: water levels and speed are modifiable  
Remote communication ready  
Multi-payable systems  
Short washing cycles (Heating Power 6 kW)



## EFFICIENCY

Intelligent weighing system: automatic adjustment of water and chemicals  
Optimal loading: manual indication of the loading weight  
High G-FACTOR of 450: Reduced residual moisture > reduced drying time



## ROBUSTNESS

Outer casing in grey skinplate  
Robust aluminium door  
AISI-304 stainless steel inner/outer drum and ribs  
No inner drum seal (muffle), easy to repair/clean  
Industrial house bearing and bearings (Up to 15,000 working hours) and possibility to replace bearings  
Same motor and inverter as DOMUS industrial washers DHS  
Industrial and heavy duty doorlock



## OTHERS


Free standing washers (leveling feet included)  
LOADING AID feature: water and rotation control  
Detergent dispenser with 4 compartments  
Frequency inverter to control imbalances  
CE, WRAS and EAC approved product. Option ETL



## OPTIONS

- Double drain
- Drain-pump kit
- Silicon gasket
- Reversible door opening
- Tropicalized model: protected board
- Relay card with 6 extra dosing signals: up to 14 signals
- DomusConnect communication
- Printer
- Normally closed drain valve
- Plinth for better ergonomics
- Plinth for mops, with filter (only valve models)
- Plinth for water recovery (tank included)
- Stainless steel AISI 304 outer casing
- Delayed door opening in case of power outage
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Voltage 110-120 V I 50/60 Hz No neutral
- Coin/token kit

TECHNICAL DATA	UNIT.	HPW-8 V	HPW-8 P	HPW-10 V	HPW-10 P
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	9/8	9/8	11/10	11/10
Volume	l	80	80	100	100
Diameter	mm	532	532	532	532
Depth	mm	360	360	425	425
<b>GENERAL DETAILS</b>					
Washing speed / Spinning speed	r.p.m.	50/ 1.250	50/ 1.250	50/ 1.250	50/ 1.250
G Factor	-	450	450	450	450
Maximum force transmitted	KN	1,47 ± 0,53	1,47 ± 0,53	1,57 ± 0,53	1,57 ± 0,53
Frequency-dynamic force	Hz	18,33	18,33	18,33	18,33
Coin laundry version	-	Yes	Yes	Yes	Yes
Double drain	-	Yes	No	Yes	No
Noise level	dB	<70	<70	<70	<70
Weighing system / Tilting system	-	No/No	No/No	No/No	No/No
<b>DOOR</b>					
Height center door / Height base door	mm	537/280	537/280	537/280	537/280
Diameter	mm	373	373	373	373
<b>POWER</b>					
Motor	kW	0,75	0,75	0,75	0,75
Electric heating power	kW	6	6	6	6
Total electric power (electric model)	kW	6	6	6	6
Total electric power (steam model)	kW	6,25	6,25	6,25	6,25
<b>CONNECTIONS</b>					
Water inlet	inch	3/4"	3/4"	3/4"	3/4"
Drain	mm/inch	2"	1" (Pump)	2"	1" (Pump)
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Width / width	mm	680/710	680/710	680/710	680/710
Depth / depth	mm	698/832	698/832	742/832	742/832
Height / height	mm	1.040/1.130	1.040/1.130	1.040/1.130	1.040/1.130
Net weight / Gross weight	kg	140/150	140/150	150/160	150/160

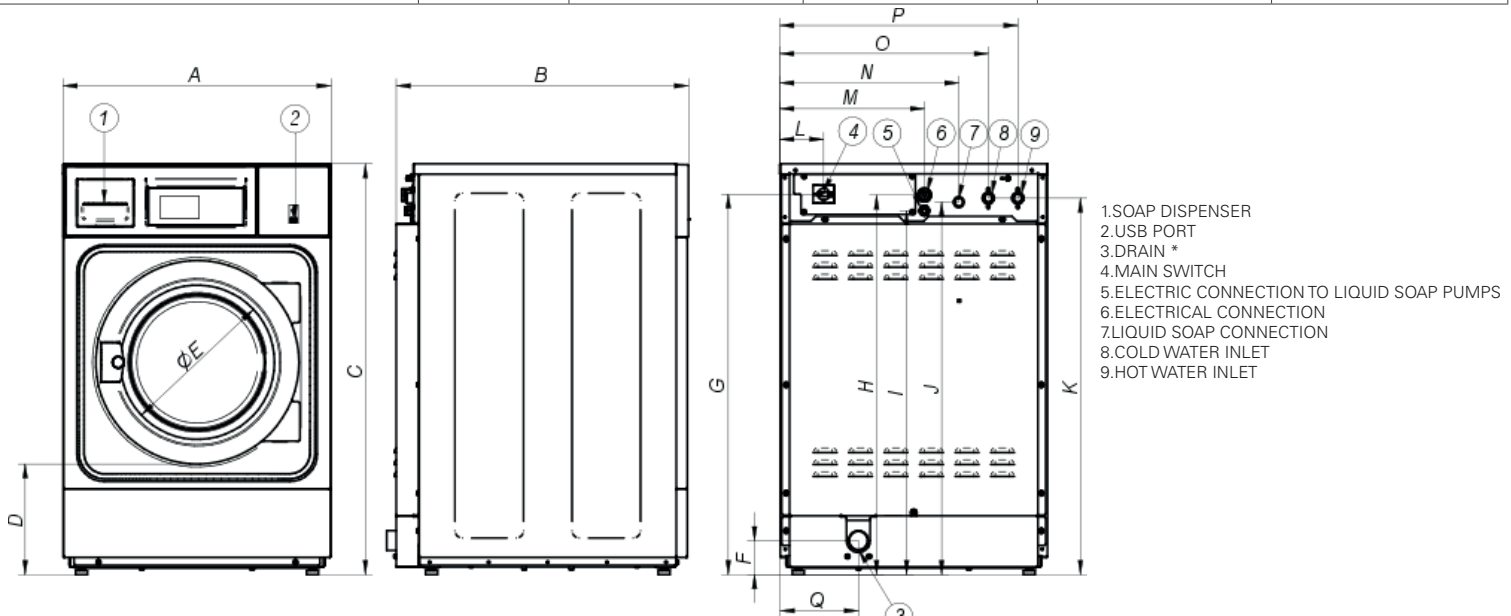

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
HPW-8 V	680	698	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
HPW-8 P	680	698	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-
HPW-10 V	680	742	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
HPW-10 P	680	742	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-