



ELECTRONIC CONTROL

NPR-1025, NPR-1225, NPR-1425, NPR-2025

- Digital screen: precise control of temperature.
- Preset ironing speeds, not adjustable.

NPR-1425, NPR-2025 ECO-ENERGY

- Simple and user friendly with an **automatic mode**: automatic management of ironing speed according to the selected temperature.
- Digital speed and temperature display.



EFFICIENCY

- Acoustic comfort: 65 dB max.
- Minimum space requirement: space saving, suitable for small spaces.
- Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.
- Speed control via potentiometer as an option.
- Heating plate with improved adaptation to different fabric thicknesses.



ROBUSTNESS

- Nomex quality coating: resistant to high temperatures (option, standard on ECO-ENERGY).
- Panels in grey Skinplate and stainless steel.
- Wooden feeding board.
- Industrial components, more durable.
- Gas spring located under the tray: less exposed to heat, no risk of leaks.
- Temperature probe screwed to the plate with thermal paste: no risk of damage.
- Klixon thermostat for greater safety and reliability.



OUTSTANDING FEATURES

- Large roll contact area with the linen.
- Roll lifting control by pedal or automatic roll lifting control by foot cell detection.
- Two available models:
 - **Standard**: roll with cotton polyester coating.
 - **Nomex**: roll with Nomex coating.
- **NPR ECO-ENERGY Models**:
 - Large roll contact area with the linen.
 - Mode of operation identical to a flatwork ironer: no roll lifting, more ergonomic.
 - Models equipped with Nomex belts, suction and variable speed inverter, more productivity.
 - Adjustable speed and temperature.




MAINTENANCE

- Easy installation: requires only an electrical connection.
- Easy access on both sides for maintenance.
- Quick and easy dismantling of bearings.
- Thermostat and probe accessible from the rear without removing the heating plate.



OTHERS


- Front feeding and return.
- Roll Ø 250 mm. Working widths: 1.000, 1.200, 1.400, 2.000mm.
- Electric heating.
- CE certification.

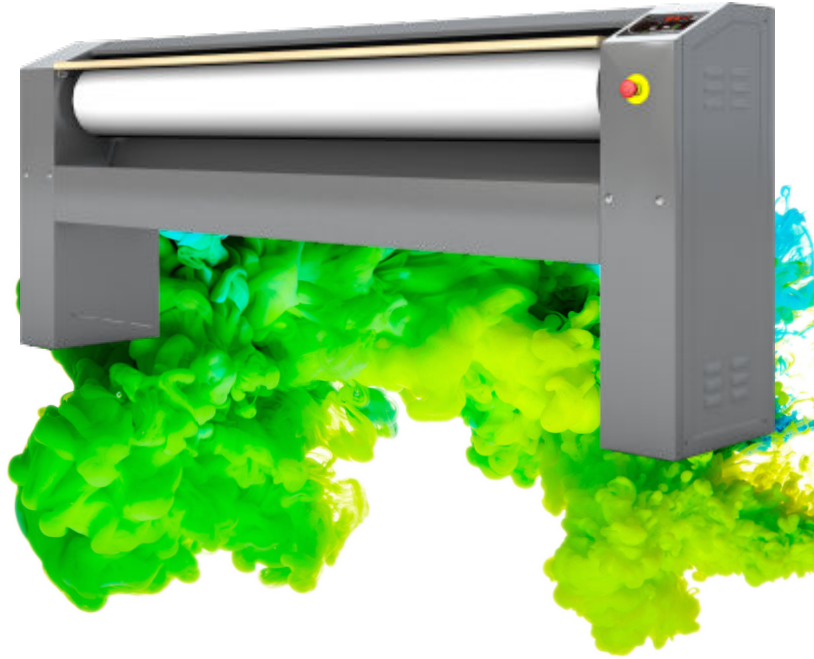

OPTIONS

- Pedal control instead of photocell
- 230V 1~ + N 50Hz(except mod. 200 ECO-ENERGY)
- 400V 3~ + N + T 60Hz
- 440V 3~ (No N) 60Hz (marine)

GENERAL DETAILS		UNIT.	PR-1425 NOMEX
Theorical production: 20-25 humidity		Kg/h	30
		Lb/h	66,14
Roll Ø		mm	250
		inch	9,84
Working width		mm	1.400
		inch	55,12
Working speed		m/min	4.2
		ft/mn	13,77
Electronic control		-	YES
Chest motion		-	Automático
POWER			
Heating power		Kw	7
Roll motor power		Kw	0,18
Fan motor power		Kw	0
Total electric power		Kw	7,18
CONNEXIONS			
Tension 230 V I + N + T	nº x mm²/A		3 x 10 / 40A
	nº x AWG/A		3 x 7 / 40A
Tension 230 V III + T	nº x mm²/A		4 x 4 / 20A
	nº x AWG/A		4 x 11 / 20A
Tension 400 V III + N + T	nº x mm²/A		5 x 2,5 / 16A
	nº x AWG/A		5 x 13 / 16A
DIMENSIONS			
Net / gross width	mm		1.862 / 1.890
	inch		73 / 74
Net / gross depth	mm		484 / 540
	inch		19,06 / 21,26
Net / gross height	mm		985 / 1.130
	inch		38,78 / 44,49
Net / gross weight	Kg		134 / 154
	Lb		295,42 / 339,51
Net / gross volume	m³		0,89 / 1,15
	ft³		31,43 / 40,61
OTHERS			
No. Fume outlet	Nº		-
Ø Fume outlet	mm		-
	inch		-
Air flow	m³/h		-
	cfm		-
Noise Level	dB		55

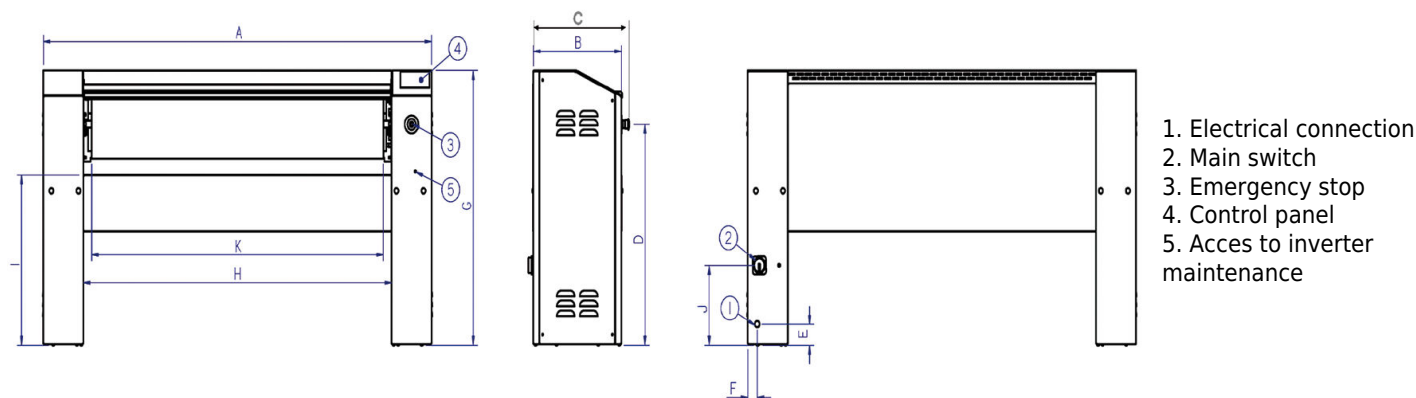

	A	B	C	D	E	F	G	H	I	J	K
PR-1025 NOMEX	1.462	423	484	791	75	45	985	1.079	610	287	988
PR-1225 NOMEX	1.662	423	484	791	75	45	985	1.279	610	287	1.198
PR-1425 NOMEX	1.862	423	484	791	75	45	985	1.479	610	287	1.398

	A	B	C	D	E	F	G	H	I	J	K
PR-2025 NOMEX	2.462	423	484	791	75	45	985	2.079	610	287	1.998